



**NOKTON Vintage Line
75mm F1.5 Aspherical VM**

INSTRUCTION MANUAL

Voigtländer VM-mount lenses cover the full frame format and are manually controlled lenses. The user sets focus and aperture. They are designed to be used on both rangefinder film cameras and digital cameras with M-type lens mount. They can also be used on mirrorless cameras with appropriate adapters.

Features of Voigtländer VM-mount lens

- VM-mount
- Full frame format
- Smooth focus for precise focusing
- All metal construction

Tips for lens care and safety

These tips are to protect the user from injury or damaging the lens.



WARNING

If the user ignores this warning sign and uses the equipment the wrong way serious injuries and even death might be the result.



CAUTION

If the user ignores this caution sign it might result in injuries and damage the equipment.



WARNING

Never look directly at the sun with a telephoto lens as this can damage your eyes.



CAUTION

Keep the lens, camera and accessories out of reach of children.





CAUTION

Store the lens away from direct sunlight and always store the lens with lens-cap on. Failure to do so can create a fire hazard.

Never touch the lens surface. In case it is dirty or dusty use commercial lens cleaner or appropriate lens cleaning cloth.

Description of Parts

- ① Lens Hood
- ② Filter Ring
- ③ Aperture Ring
- ④ Depth of Field Ring
- ⑤ Distance Scale
- ⑥ Focus Ring
- ⑦ Mount Index Ring
- ⑧ Mount
- ⑨ Hood Locking Screw
- ⑩ Aperture Scale
- ⑪ Depth of Field Scale
- ⑫ Distance/ Aperture Index
- ⑬ Mount Index
- ⑭ Hood Attachment Ring

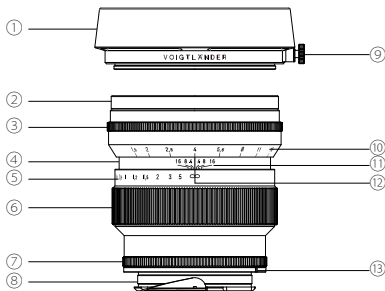

● How to attach/detach the lens

Please refer to the instruction manual for your camera for how to attach/detach the lens. Please hold Mount Index Ring ⑦ to attach/detach the lens. To attach/detach the lens while holding other parts of the lens barrel can damage the lens.

● Attaching Hood

Unfix the Hood Fixing Screw ⑨ and pull the Hood Attachment Ring ⑭ out of Lens Hood ①. Screw the Hood Attachment Ring ⑭ onto Lens. Put the Lens Hood ① onto Hood Attachment Ring ⑭ and fix it by tighten the Hood Fixing Screw ⑨.

The Lens Hood ① can be reverse-mounted on the Hood Attachment Ring ⑭ for storage and portability.

*)The lens cap can be put on the thread inside Hood Attachment Ring ⑭.

*) This thread is only for attaching the lens cap(not for attaching filters).

● Rangefinder coupling

Coupled focusing range of this lens is $\infty \sim 0.7\text{m}$. However, rangefinder coupling range will be different depending on the rangefinder mechanism of the camera used.

● Attaching Filter

Screw the filter (Ø58mm) to the front of the lens.

● Attaching Mount Adapter

This lens can be used with Micro Four Thirds mount Cameras / E-mount cameras by using Voigtländer VM Micro Four Thirds adapter / VM E-mount adapter II / VM-E Close Focus adapter.

● Specifications

Product Name	NOKTON Vintage Line 75mm F1.5 Aspherical
Focal Length	75mm
Maximum Aperture	F1.5
Minimum Aperture	F16
Lens Construction	6 groups 7 elements
Angle of View	32.6°
Aperture Blade	12
Rangefinder Coupling	$\infty \sim 0.7\text{m}$
Minimum Focus	0.7m
Filter	Ø58mm
Maximum Diameter	Approx. Ø62.8mm
Length	Approx. 63.3mm
Weight	Approx. 350g
Mount	VM-mount
Supplied Accessory	Lens Hood, Front Cap, Rear Cap

* Specification and information is subject to change without prior notice.